

AUBGC30DH THRU AUBGC30MH

● **FEATURES**

- * Halogen-free type
- * Compliance to RoHS product
- * GPRC (Glass passivated rectifier chip) inside
- * Glass passivated cavity-free junction
- * Lead less chip form, no lead damage
- * Low forward voltage drop
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Comply with AEC-Q101

● **APPLICATION**

- * General purpose rectification
- * Surge absorption
- * Automotive

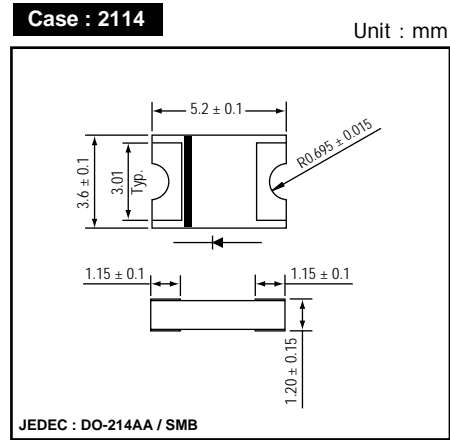
● **MECHANICAL DATA**

Case : Packed with FRP substrate and epoxy underfilled
Terminals : Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.
Polarity : Cathode Band, Laser marking
Weight : 0.04 gram


● **PACKING**

- * 5,000 pieces per 13" (330mm ± 2mm) reel
- * 2 reels per box
- * 5 boxes per carton

● **OUTLINE DIMENSIONS**



● **MARKING**

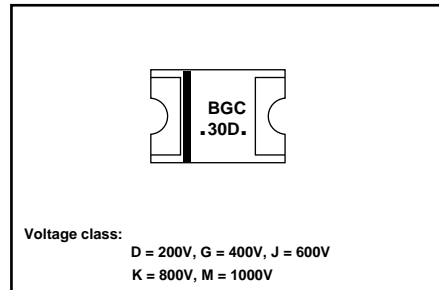





Absolute Maximum Ratings (Ta = 25 °C)

| ITEM | Symbol | Rating | | | | | Unit |
|--|--------|-------------|-----------|-----------|-----------|-----------|------|
| | | AUBGC30DH | AUBGC30GH | AUBGC30JH | AUBGC30KH | AUBGC30MH | |
| Repetitive peak reverse voltage | VRRM | 200 | 400 | 600 | 800 | 1000 | V |
| Average forward current | IF(AV) | 3.0 | | | | | A |
| Peak forward surge current (8.3ms single half sine-wave) | IFSM | 95 | | | | | |
| Operating junction temperature Range | Tj | -65 to +175 | | | | | °C |
| Storage temperature Range | TSTG | -65 to +175 | | | | | |

Electrical characteristics (Ta = 25 °C)

| ITEM | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|---------|-----------------------------|------|------|------|------|
| Forward voltage | VF | IF = 3.0A | - | 0.94 | 1.00 | V |
| Repetitive peak reverse current | IRRM | VR = Max. VRRM , Ta = 25 °C | - | 0.10 | 5 | uA |
| Junction capacitance | Cj | VR = 4V, f = 1.0 MHz | - | 23 | - | pF |
| Thermal resistance | Rth(JA) | Junction to ambient (NOTE) | - | 74 | - | °C/W |
| | Rth(JL) | Junction to lead (NOTE) | - | 10 | - | |

NOTES : Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas.

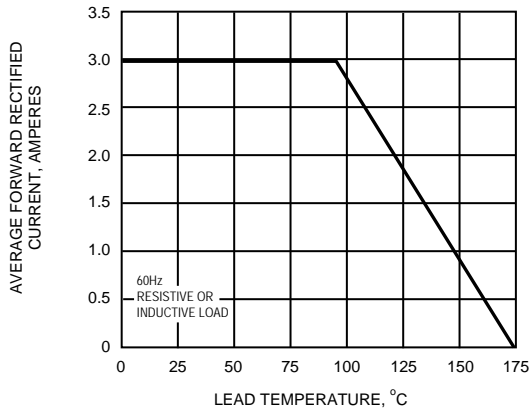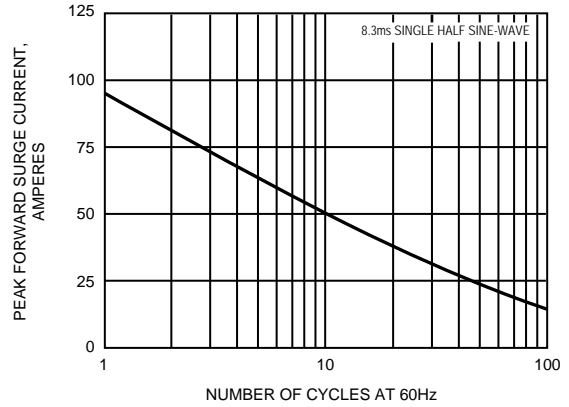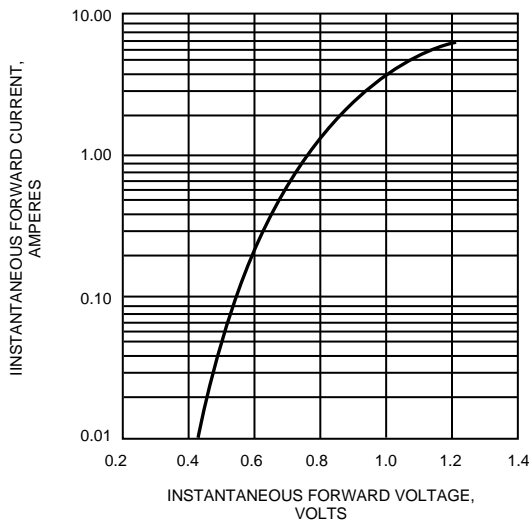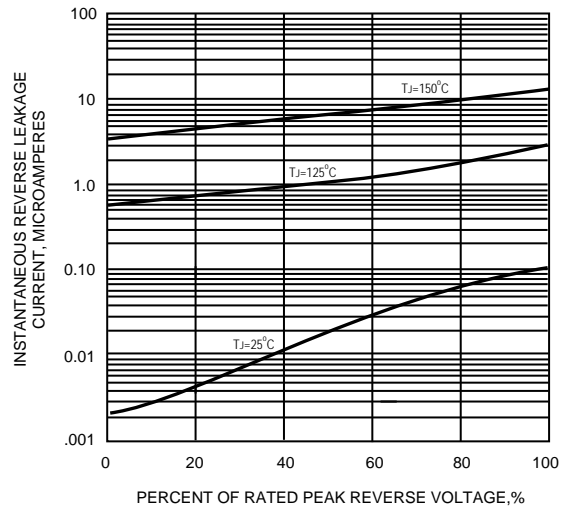FIG.1 - FORWARD CURRENT DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4 - TYPICAL REVERSE CHARACTERISTICS

FIG.5 - TYPICAL JUNCTION CAPACITANCE
